

KOTA

STEEL FLUE 24

Ø 150 mm

EVERYTHING IN ONE PACKAGE!



NEW SIMPLE, COMPLETE AND INSTALLATION-READY FLUE KIT

Kota Steel Flue 24 is a high-quality and safe choice for sauna heaters and other fireplaces. The kit includes all parts and accessories needed for installation and connection of the flue. In the design of the flue particular attention has been paid to fire-safety and insulation of the flue around the feedthrough of the ceiling. The modular design of the steel flue enables the flue to be installed considering the specific conditions of a particular building.

The outer casing of the flue is made of zinc-coated steel finished with black heat-resistant paint. The diameter of the flue is 280 mm. The flue is insulated with fire-resistant mineral wool. The inner tube with a diameter of 150 mm is made of stainless steel. The flue is also equipped with a permanently installed damper. **The safe Kota Steel Flue is provided with CE-marking confirming that the flue fulfils the requirements of fire safety class T600.**

Insulation of the feedthrough of the ceiling and the feedthrough cover allow efficient insulation of the chimney. The function of the latter is to avoid excessive temperature rise of the insulation material of the ceiling.



YOU CAN INSTALL THIS FLUE EASILY BY YOURSELF!

The length of the insulated section of the Kota Steel Flue 24 is 2 400 mm and it includes all parts needed for installation:

The max. full size of the main kit without extension sections is approximately 2 530 mm.

- » 1 200 mm insulated damper section and 1 200 mm flue section (inner diameter of the pipe is 125 mm)
- » Protective ring
- » 1 000 mm non-insulated, stainless steel connection pipe (inner diameter 120 mm).
- » Fastening ring
- » Feedthrough flange 0–22°
- » Vapour barrier flange 0–22° and vapour barrier tape
- » Feedthrough insulation 200 mm
- » Feedthrough cover, height 400 mm
- » Carrier ring of the flue with perforated band
- » Support of the base
- » Rubber sealing of the roof
- » Rainfall cover of the flue

Extension sections 600 mm and 1 200 mm of Kota Steel Flue 24:

- » By using the main part and insulated extension sections you can build a flue with the exact height you need.

Kota Steel Flue 24 Ø 150 mm		
EAN-CODE	Product No	PRODUCT
6 4 1 8 5 3 0 0 6 0 4 0 3	6040	Kota (Ø 150 mm) flue 24
6 4 1 8 5 3 0 0 6 1 6 0 8	6160	Kota (Ø 150 mm) flue extension section 60 cm
6 4 1 8 5 3 0 0 6 1 7 0 7	6170	Kota (Ø 150 mm) flue extension section 120 cm


The safety distance between combustible material and an insulated section is 70 mm and between a non-insulated section is 700 mm.

NARVI Oy

Yrittäjäntie 14, FI-27230 Lappi

mob. +358 207 416740

www.narvi.fi/en

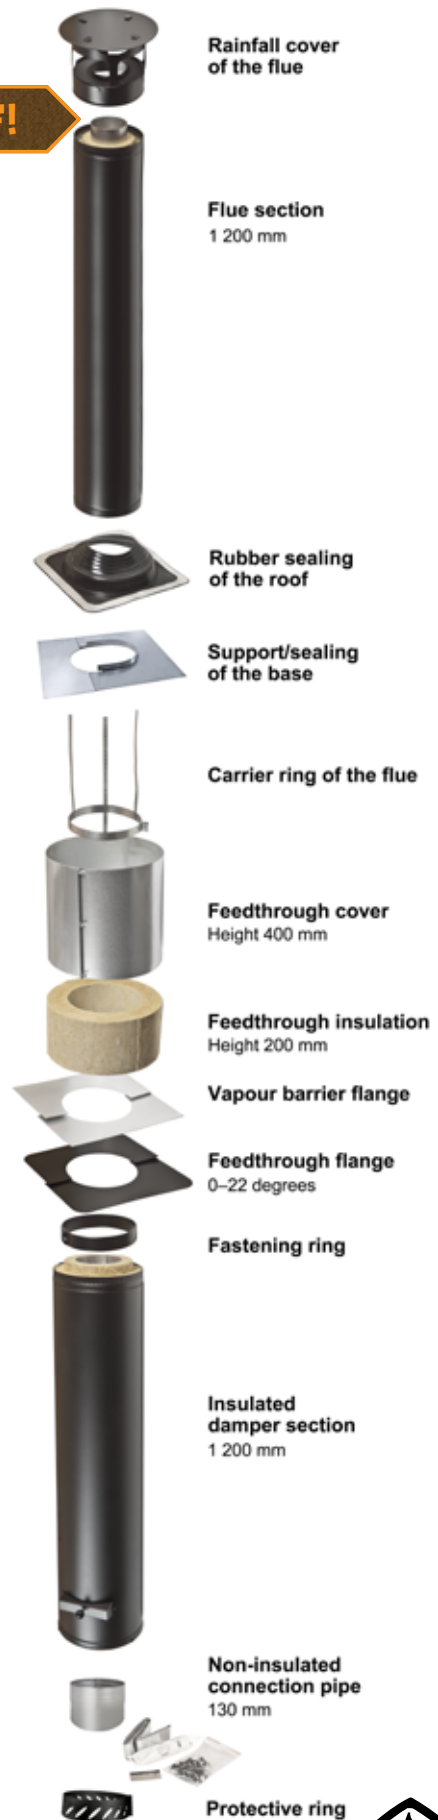

Made by **NARVI Oy** Finland